



STRUCTURAL ANGLE DETAILS

ALL STRUCTURAL SUPPORTS WILL BE DETERMINED BY WINDLOAD REQUIREMENTS AND LOUVER CONFIGURATIONS

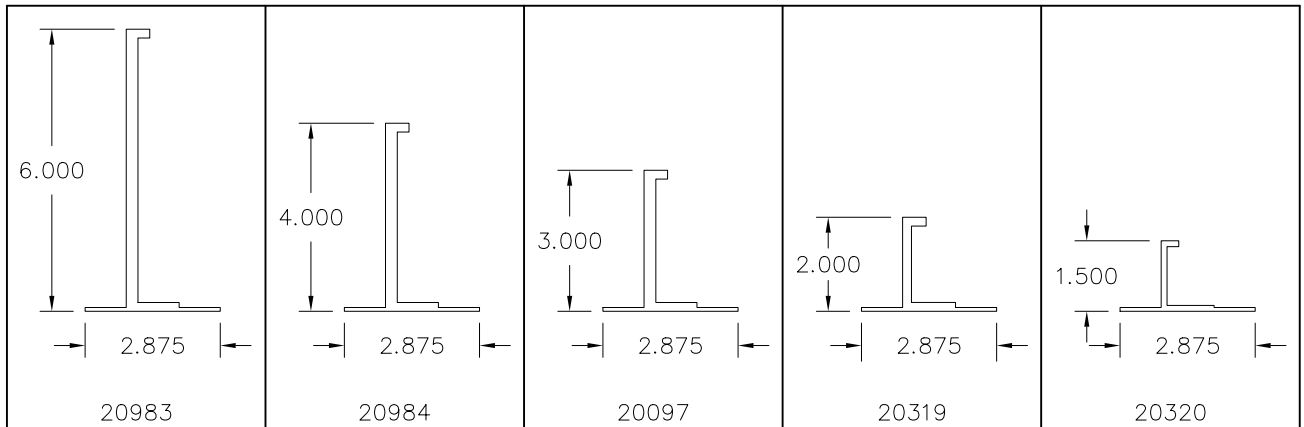

NOTE: DOUBLE FLANGE ANGLES ARE USED AT INTERMEDIATE SUPPORT LOCATIONS AND CANNOT BE USED ADJACENT TO SECTION BREAK LOCATIONS.

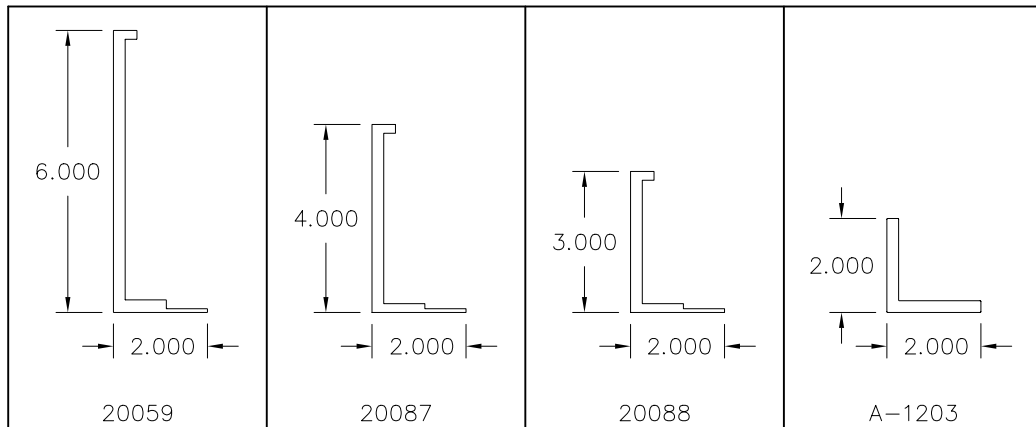

NOTE: SINGLE FLANGE ANGLES ARE PRIMARILY USED FOR MULTIPLE SECTION LOUVERS ADJACENT TO SECTION BREAK LOCATIONS.

PROJECT:	LOCATION:
ARCH./ENGR.:	CONTRACTOR:
REPRESENTATIVE:	DATE: